

SPECIFICATIONS





Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

2363 02 XX X N XX R Y X 01

No. of Pins Per Row: 2*40
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Contact Plating:
 G1: Gold Flash
 G2: 1.5U" Gold
 G3: 2U" Gold
 G4: 3U" Gold
 G5: 5U" Gold
 S0: Gold Flash/Tin
 SN: Tin
 Packing:
 O=PE Bag
 A=Troy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar
 SN: Tin

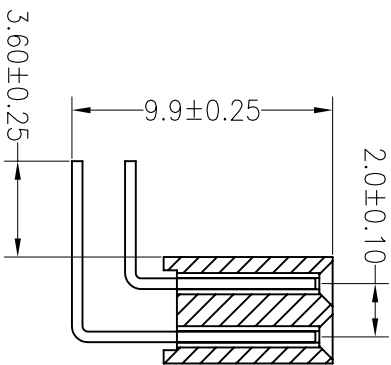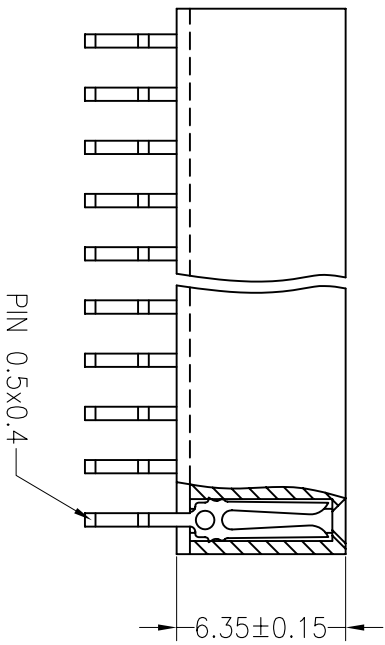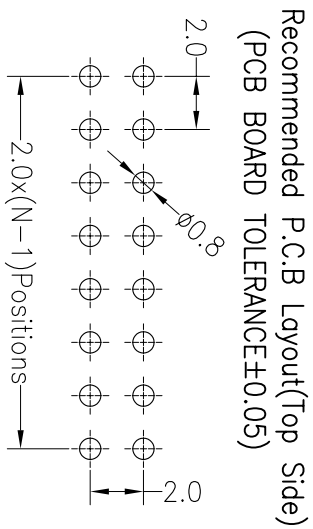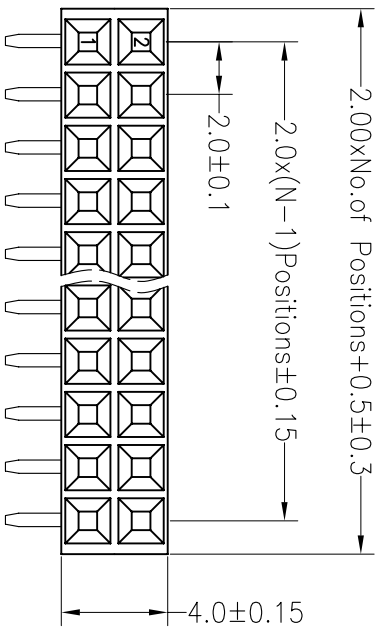

OPERATION	X.X	±0.30	DRAW	YHUSheng	12.04.18	SCALE	FIT	UNIT	mm
	X.XX	±0.20							
Angle	X.XXX	±0.10	APPROVE			SIZE	A4	SHEET	1/1
	Angle	±3°							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE			PROJ.			
A0	2012.04.18	NEW DRAWING							

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 236302XXXXXXRX01
 TITLE: 2.00PF H6.35mm 2x40pin 90°