

SPECIFICATIONS

Rated(额定参数): 300V,8A  
 Dielectric strength(抗电强度): AC1500V/1 Minute  
 Insulation Resistance(绝缘电阻):1:1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Wire Range(线径):16~28AWG  
 Strip length(剥线长度):8~9mm  
 Temp. range(操作温度): -40°C~+105°C  
 MAX Soldering(瞬时温度):+260°C,5s  
 IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	250V	160V
Rate current(A)	7A		



Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)

PITCH RANGE	NOMINAL DIMENSION RANGE					
	IN MM	IN MM	IN MM	IN MM	IN MM	IN MM
TO 6	OVER 6	OVER 10	TO 10	OVER 30	OVER 60	OVER 100
TO 10	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70
						±1.00

# Ordering Information

**JL15EDGKDM-381 XX G 01**

Pitch 381=3.81PH No. of pins 2P,3P,4P~24P  
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey  
 Packing 0=Pe bog T=Tube A=Troy

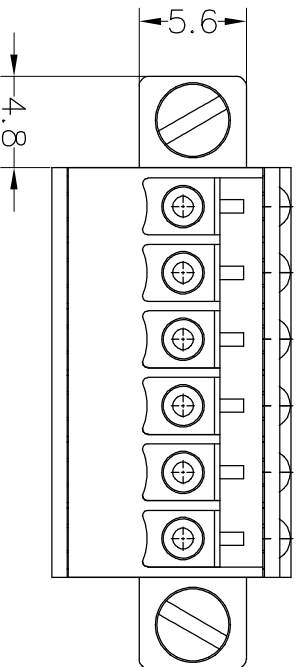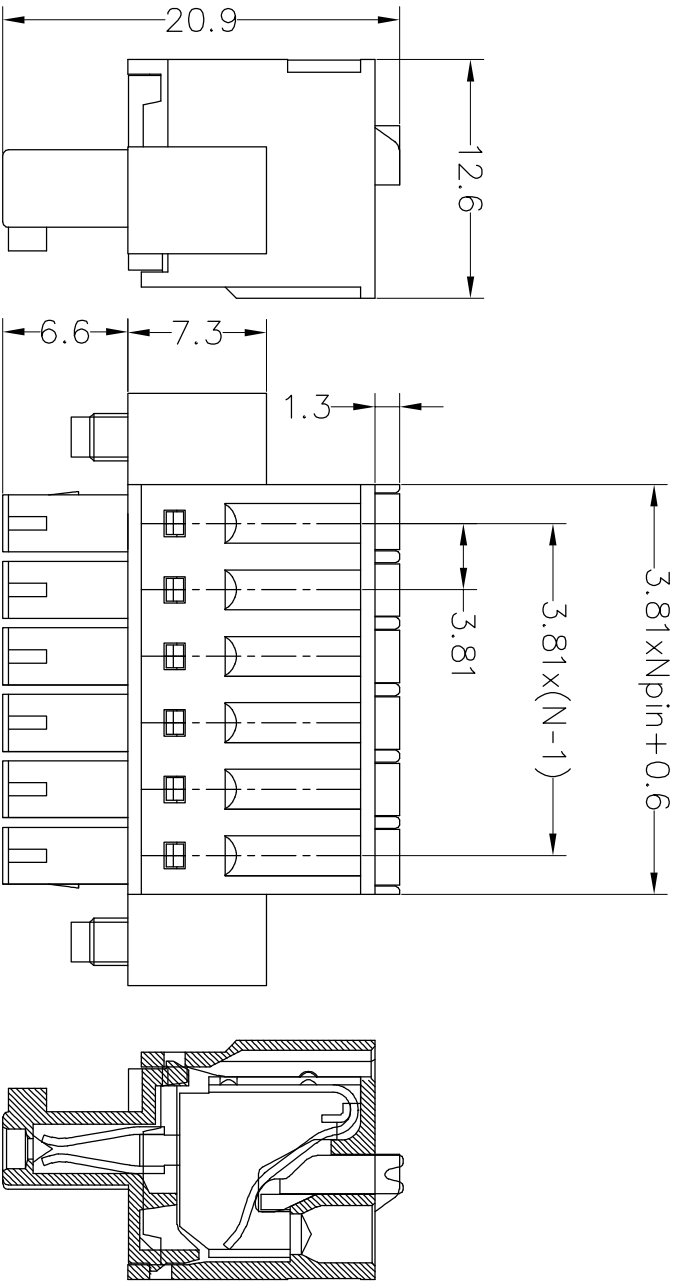

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JL15EDGKDM-381XXG01
	CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLANG GAO		SIZE	A4	TITLE:	JL15EDGKDM-381-XXP 插拔式母座/带耳/绿色
			SHEET	1/1		
			PROJ.			

**JILIN** 东莞市锦凌电子有限公司  
 DONGGUAN JINLING ELECTRONIC CO., LTD