


HSE RoHS


SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Tin Plated
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

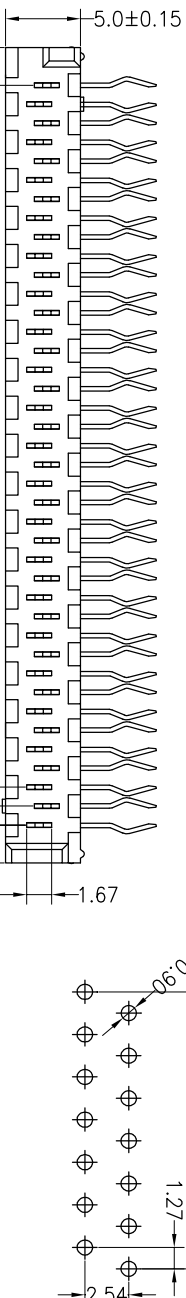


Recommended P.C.B Layout(Top Side)

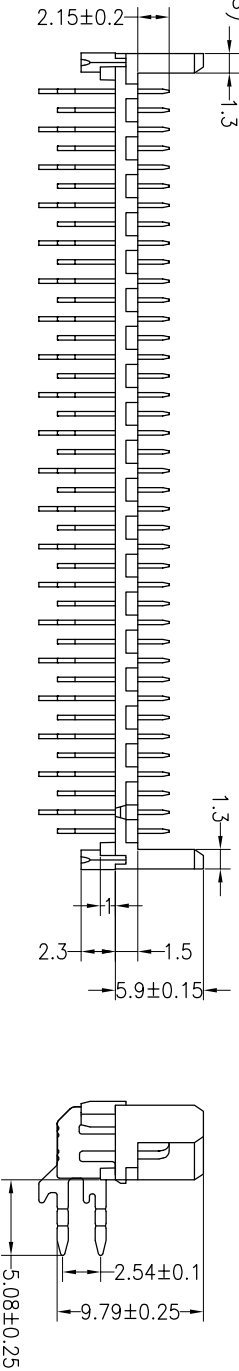

Ordering Information

4100 XX M R SM F X X 01

No. of Pins: 04~26P
 Connector Type: R=Right Angle
 Contact Plating: SN: Tin, SM: Matte-Tin
 Post: W=With Post, N=W/O Post
 Packing: T=Tube, R=Reel+Cap

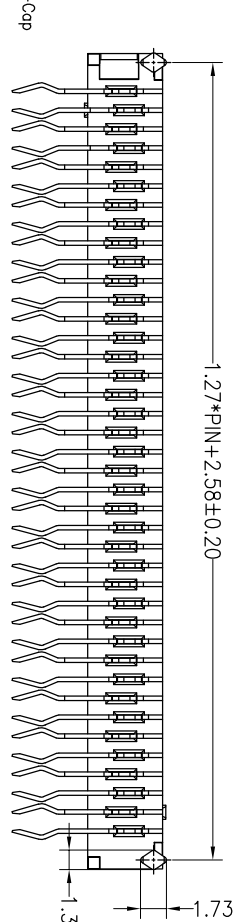

OPERATION		DRAW		BEN		SCALE		FIT		PART NO.	
X.X	±0.30			16.12.09		UNIT	mm				4100XXMRSMFXX01
X.XX	±0.20	CHECK				SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10					SHEET	1/1	PROU.		1.27 Picoflex Header Connector 90° DIP	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE				
1	2016.12.09	NEW DRAWING									

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992